


F510 - Filtre à air comprimé de petite taille avec un débit volumique important, purge manuelle ou automatique, corps aluminium, G1/4" à G1/2"

Description	Compressed air filter in small design with large volume flow. Can be blocked with an oiler without use of a double nipple.		
Filter element	40 µm, optionally 5 µm, made of sintered bronze		
Bowl	metal version with sight glass		
Drainage	manual drain as standard, optionally automatic drain max. 10 bar		
Operating pressure	max. 17 bar		
Operating pressure	0 °C to 80 °C		
Material	Body:	Alu die-cast	Sightglass: Polycarbonate
	Bowl:	Alu die-cast	Elastomer: NBR
	Inner valve:	brass, plastic	



G1/4 up to G1/2

Dimensions			Bowl		Flow rate		P ₁	Filter-element	Connection	Order
A	B	C	Design	Capacity	m ³ /h*1	l/min*1	max.	µm	thread	number
mm	mm	mm	made of/with	l			bar		G	

Standard compressed air filter										F510
					with manual drain, supply pressure max. 17 bar					
73	166	149	metal / sight glass	0.2	150	2500	17	40	G1/4	F510-02WJ
					126	2100		5		F510-02WG
73	166	149	metal / sight glass	0.2	180	3000	17	40	G3/8	F510-03WJ
					156	2600		5		F510-03WG
73	166	149	metal / sight glass	0.2	210	3500	17	40	G1/2	F510-04WJ
					186	3100		5		F510-04WG




F510

Special options, add the appropriate letter


automatic drain	SA-500 max. 10 bar	F510-0 . W . R
flange connection	according EN-1092-1 or ASME B16.5	on request F510-0 . W . F .

Accessories, enclosed


mounting bracket	made of stainless steel	BW00-510
-------------------------	-------------------------	-----------------

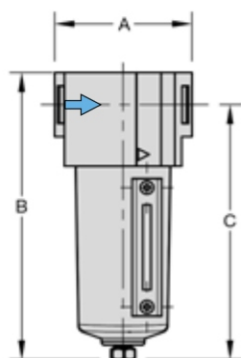

F510



BW00-510

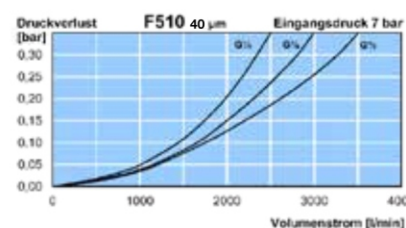

*1 at 7 bar supply pressure and 0.33 bar pressure drop