


L530 - Huileur pneumatique à brouillard, de petite taille et grand débit

Raccordement G3/4" à G1.5" - 17 bar

Description	Standard mist lubricator in modular design with large volume flow. Can be blocked with filter or regulator without the use of a double nipple. Bypass valve and Venturi nozzle ensure low pressure loss and continuous compressed air lubrication.		
Bowl	metal bowl with sight glass		
Operating pressure	max. 17 bar		
Oil refilling	oil refilling under pressure possible		
Temperatur range	0 °C up to 80 °C		
Material	Body: alu die-cast Bowl: alu die-cast	Sight glass: Polyurethan Elastomer: NBR	

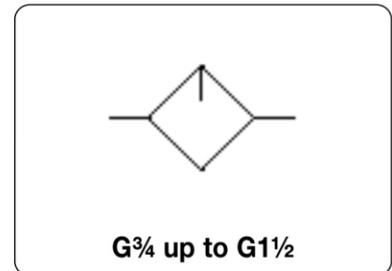

Dimensions			Bowl	Flow rate	Operating pressure	Connection	Order number
A	B	C	Design	Capacity	rate	thread	number
mm	mm	mm	made of/with	l	m ³ /h*1	l/min*1	max. bar

"Maxi"-Druckluftöler				Betriebsdruck max. 17 bar				L530	
120	338	257	metal/sight glass	1.0	840	14000	17	G ^{3/4}	L530-06W
120	338	257			900	15000		G1	L530-08W
120	338	257			930	15500		G1 ^{1/4}	L530-10W
120	338	257			960	16000		G1 ^{1/2}	L530-12W






L530

Special options, add the appropriate letter

flange connection according to EN-1092-1 or ASME B16.5 on request L530- . . WF

Zubehör, lose beigelegt

mounting bracket made of stainless steel BW00-530

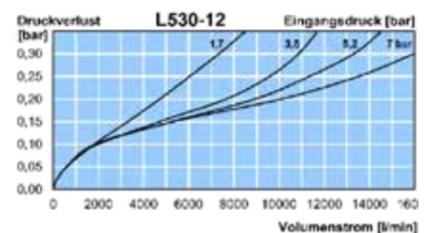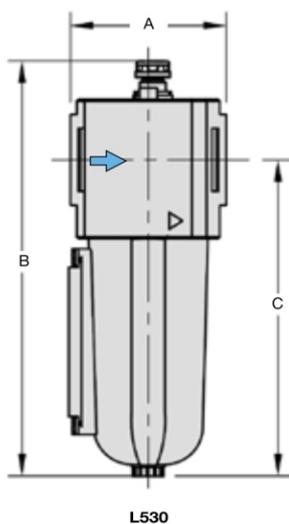

*1 at 7 bar supply pressure and 0.33 bar pressure drop