


CD2 - Unité de service FRL solide et économique en aluminium pour maintenance industrielle, G1/8" à G2"

Description	Solid, low-cost FRL service unit made of aluminium equipped with pressure gauge.
Media	compressed air or non-corrosive gases
Supply pressure	max. 16 bar for metal bowl with sight glass, max. 30 bar for metal bowl without sight glass
Adjustment	by plastic knob with snap-lock up to G $\frac{3}{8}$ by hexagon head screw from G $\frac{3}{8}$ up to G1 $\frac{1}{2}$ on (CD.-1A.) by T-handle from G1 $\frac{1}{2}$ (CD.-12.) up to G2 on
Relieving function	relieving, optionally non-relieving
Gauge port	G $\frac{1}{4}$ or G $\frac{3}{8}$ at CD.-01/-02, on both sides of the body, one screw plug supplied
Filter element	20 μ m or 50 μ m, optionally 5 μ m or 50 μ m, made of propylene Bowl metal version with or without sight glass
Drainage	semiautomatic drain as standard, optionally automatic (max. 16 bar) or manual drain for max. 30 bar
Temperature range	-10 °C to 50 °C / 14 °F to 122 °F metal bowl with sight glass, for G $\frac{3}{8}$ to G $\frac{1}{2}$ -20 °C to 60 °C / -4 °F to 140 °F metal bowl with sight glass, for G $\frac{3}{8}$ to G2 -30 °C to 80 °C / -22 °F to 176 °F metal bowl without sight glass, for all sizes
Material	Body: aluminium Elastomer: NBR/Buna-N Bowl: aluminium

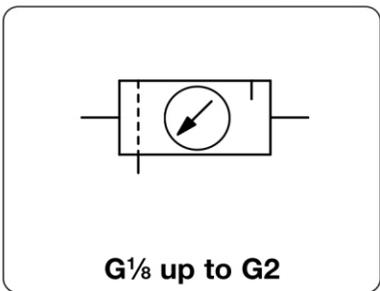

Dimensions			Combination consisting of	Bowl design made of / with	Filter element	Flow rate		Connection thread G	Order number
A	B	C				m 3 /h*1	l/min*1		

FRL unit, 2-part					P $_1$: max. 16 bar, P $_2$: 0.8...8 bar, 20 / 50 μ m, semiautomatic drain, relieving, with gauge			CD2	
80	201	128	BD+LD	metal/sight glass	50	27	450	G $\frac{1}{8}$ G $\frac{1}{4}$	CD2-01 CD2-02
128	248	148		metal/sight glass	50	108	1800	G $\frac{3}{8}$ G $\frac{1}{2}$	CD2-03 CD2-04
275	314	179		metal/sight glass	50	300	5000	G $\frac{3}{4}$ G1	CD2-06 CD2-08
386	314	179		metal/sight glass	50	300	5000	G1 $\frac{1}{4}$ G1 $\frac{1}{2}$	CD2-10 CD2-1A
355	483	223		metal/sight glass	50	960	16000	G1 $\frac{1}{2}$ G2	CD2-12 CD2-16






Special options, add the appropriate letter

5 μ m filter element		CD2-..G
0.3...3 bar regulation range		CD2-..B
1 ...15 bar operating press.		CD2-..E
30 bar manual drain	only for metal bowl (without sight glass) with manual drain max. 16 bar	CD2-..NH
automatic drain	drainage by float valve, max. 16 bar	CD2-..R
flange connection	according to EN-1092-1 or ASME B16.5 on request	CD2-..F.

Accessories, enclosed

mounting bracket	made of steel	for G $\frac{3}{8}$ and G $\frac{1}{4}$	BW30-02
mounting nut	made of plastic	for G $\frac{3}{8}$ and G $\frac{1}{4}$	M30x1,5K
mounting bracket	made of steel	for G $\frac{3}{8}$ and G $\frac{1}{2}$	BW50-03
mounting nut	made of plastic	for G $\frac{3}{8}$ and G $\frac{1}{2}$	M50x1,5K
mounting bracket	made of stainless steel	for G $\frac{3}{4}$ up to G1 $\frac{1}{2}$ (1A)	BW00-59S
set of brackets	made of steel	for G1 $\frac{1}{2}$ (12) and G2	BW00-61



*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop

