


# LM - Lubricateur, huileur, graisseur pour air comprimé, haute pression 50 bar

<b>Description</b>	Lubricator for compressed air with bowl without sight glass, extremely robust, with manual adjustment of oil drip rate.
<b>Bowl</b>	stainless steel version without sight glass up to G1 brass version without sight glass at G1½ and G2
<b>Operating pressure</b>	max. 50 bar
<b>Temperature range</b>	0 °C to 80 °C / 32 °F to 176 °F for FKM 0 °C to 130 °C / 32 °F to 266 °F for high temperature version, for appropriately conditioned air down to -20 °C / -4 °F
<b>Material</b>	Body: brass Bowl: stainless steel 316L / material no. 1.4404 Elastomer: FKM Inner valve: brass and plastic (not at high temperature version)

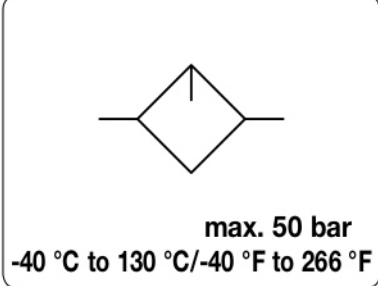

Dimensions			Bowl		Flow	Operating	Connection	Order
A	B	C	Desing	Capacity	rate	pressure	thread	number
mm	mm	mm	made of	l	m³/h*1	l/min*1	max. bar	G




Compressed air lubricator made of brass								Operating pressure max. 50 bar	LM
64	173	130	stainless steel	0.14	54	900	50	G¼	LM-02
79	175	130	stainless steel	0.20	144	2400	50	G½	LM-04



**Special options,** add the appropriate letter or number

**up to 130 °C / 266 °F** high temperature version **LM-... X54**

**flange connection** see chapter for stainless steel devices / flanges **LM-... F.**

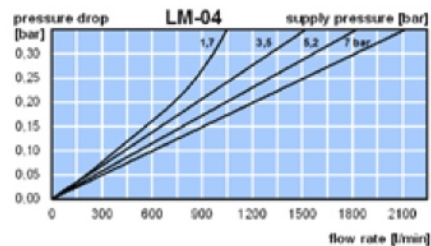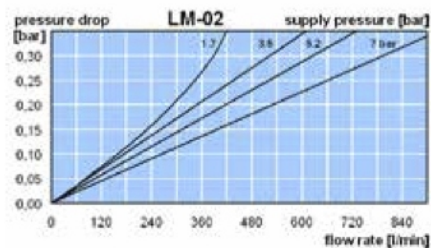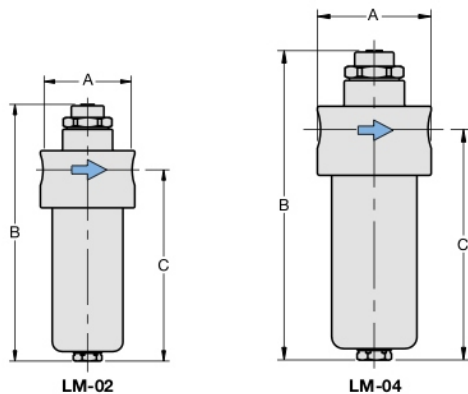

\*1 at 7 bar operating pressure and 0.33 bar pressure drop