


PQ1 - Régulateur de pression à commande électrique proportionnelle, 0/10V ou 4/20mA

Technical features

• Pressure range	0 ... 10 mbar up to 0 ... 35 bar	• Linearity	± 0.15% FS
• Input signal	0 ... 10 V and 4 ... 20 mA	• Hysteresis	± 0.15% FS
• Security	constant outlet pressure at voltage drop	• Response sensitivity	< 0.1% FS
• Response time	10 to 15 ms	• Repeatability	± 0.02% FS
• Adjustment	zero point and span	• Protection class	IP 65
• Sensitivity	immune to shock and vibration up to 25 g	• Air consumption	without constant bleed



accurate to 0.2%

General technical features

Description	Two solenoid valves control the system pressure. One valve is for inlet control, the other for outlet control. A strain gauge pressure transducer measures system pressure and provides a feedback signal to the electronic controls. Any difference between command and feedback signals causes one of the solenoid valves to open, causing system pressure to increase or decrease.		
Mounting position	any, immune to shock and vibration up to 25 g		
Protection class	IP 65 housing		
Temperature range	-5 °C to 70 °C / 23 °F to 158 °F		
Material	Body: aluminium	Elastomer: FKM	
	Transducer: aluminium and silicon	Valves: nickel-plated brass	

Pneumatic features

Media	dry, unlubricated and 5 µm filtered compressed air or non-corrosive gases
Supply pressure	see chart, minimum 10% above outlet pressure
Flow rate	35 l/min at 7 bar supply pressure and open outlet, optionally 100 l/min 3 l/min at controlled outlet pressure
Exhaust	same nominal size as on inlet valve, thus same relief capacity
Air consumption	without constant bleed

Electrical features

Supply voltage	15 ... 24 V DC, reverse voltage protection existing
Power consumption	3.6 W for regulation, 0.5 W non-regulating
Signal range	0 ... 10 V, optionally 4 ... 20 mA
Impedance	4.7 kΩ at voltage signal, 100 Ω at current signal 10 kΩ at voltage signal, 100 Ω at current signal, for external feedback
Monitor signal impedance	> 4.7 kΩ at voltage signal, <100 Ω at current signal
Electrical connector	plug M16x0.75, 7-pin, with coupling socket
Monitor signal	0 ... 10 V, optionally 4 ... 20 mA
Security	constant outlet pressure at voltage drop


Accuracy

Linearity/Hysteresis	± 0.15% FS
Response sensitivity	< 0.1% FS
Response time	10 to 15 ms
Repeatability	± 0.02% FS
Temperature influence	< 0.01% FS per °C/K at 0 °C to 50 °C / 32 °F to 122 °F < 1.00% FS per °C/K at 50 °C to 70 °C / 122 °F to 158 °F
Accuracy over all	± 0.2 % FS
Regulating time	< 2 s to fill 0.1 l volume to 90% of the initial pressure (or to exhaust) < 40 s to fill 2 l volume to 90% of the initial pressure (< 80 s to exhaust)




Adjustment

Zero point	The zero point can be increased by up to 20% of full scale, e.g. from 0 bar to 1.2 bar at a 6 bar regulator. External adjustment via potentiometer Z "zero".
Span	The maximum pressure value of the control range can be reduced by up to 20% depending on the selected pressure range, e.g. from 6 to 4.8 bar. External adjustment via potentiometer S "span".

*1 at 7 bar supply pressure and 3 bar outlet pressure

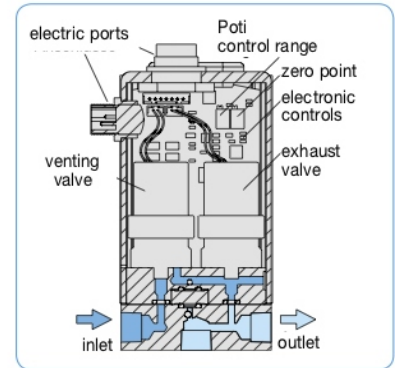


cross-section PQ

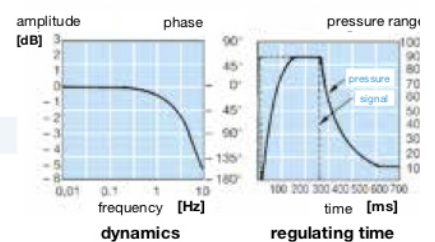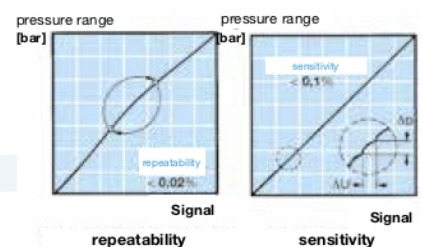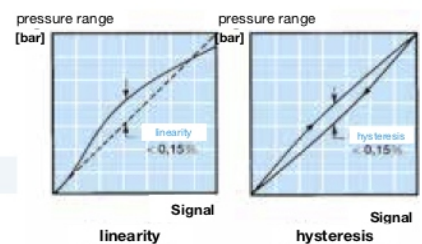

PQ1 - Régulateur de pression à commande électrique proportionnelle, 0/10V ou 4/20mA

Description	The pneumatic proportional valve produces outlet pressure in proportion to an electrical command input signal. It comprises a complete closed loop servo system consisting of valves, manifold, housing and electronic controls.
Single loop	Pressure is controlled by two solenoid valves. One valve functions as inlet control, the other as exhaust. The pressure outlet is measured by an internal pressure transducer which provides a feedback signal to the electronic controls. This feedback signal is compared with the command input signal. Any difference between the two signals causes one of the two solenoid valves to open, allowing flow into or out of the system. Accurate pressure is maintained by these two valves.
Accuracy	Linearity / Hysteresis: ± 0.15% FS Response sensitivity: < 0.1% FS Repeatability: ± 0.02% FS Accuracy over all: ± 0.2% FS

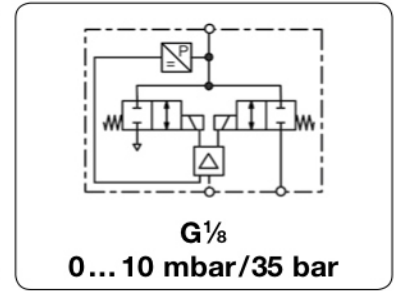

Dimensions			Flow rate	Supply pressure	Accuracy	Connection thread	Pressure range	Order number
A	B	C	l/min*1	max. mbar/bar*2	%	G	mbar/bar	

Single loop regulator			0 ... 10 V input and feedback signal, supply voltage 24 V DC, 35 l/min*1, with coupling socket		PQ1			
51	106	8	on request	10 mbar	0.2	G ¹ / ₈	0... 5 mbar	PQ1EE-A5
				20 mbar			0... 10 mbar	PQ1EE-B1
				40 mbar			0... 20 mbar	PQ1EE-B2
				100 mbar			0... 50 mbar	PQ1EE-B5
				200 mbar			0... 100 mbar	PQ1EE-C1
				400 mbar			0... 200 mbar	PQ1EE-C2
				800 mbar			0... 400 mbar	PQ1EE-C4
				1000 mbar			0... 600 mbar	PQ1EE-C6
51	106	8	35	2 bar	0.2	G ¹ / ₈	0... 1 bar	PQ1EE-01
				3 bar			0... 2 bar	PQ1EE-02
				9 bar			0... 4 bar	PQ1EE-04
				9 bar			0... 6 bar	PQ1EE-06
				9 bar			0... 8 bar	PQ1EE-08
				15 bar			0... 10 bar	PQ1EE-10
				15 bar			0... 12 bar	PQ1EE-12
				24 bar			0... 16 bar	PQ1EE-16
				24 bar			0... 20 bar	PQ1EE-20
				38 bar			0... 25 bar	PQ1EE-25
				38 bar			0... 30 bar	PQ1EE-30
				38 bar			0... 35 bar	PQ1EE-35
51	106	8	35	0 bar	0.2	G ¹ / ₈	0... -1 bar	PQ1EE-V0
				2 bar			-1 ... +1 bar	PQ1EE-V1



PQ1

Special options, add the appropriate letter or number

4-20 mA	input and monitor signal	PQ1 IC-..
flow 100 l/min	increased flow rate, max. 10 bar, not combinable with Opt. ...X58	PQ1HF
continuous regulation	improved characteristic curve through proportional inlet valve, max. 10 bar	PQ1X58
declining curve	inverted outlet	PQ1X59




Accessories, enclosed

coupling socket	M16x0,75, 7-pin with 2 m cable	straight	PRK-A2L
		angular	PRK-C2L
mounting bracket	made of steel		PQKT-01



PRK-A

PRK-C

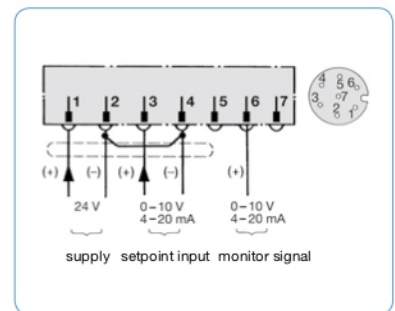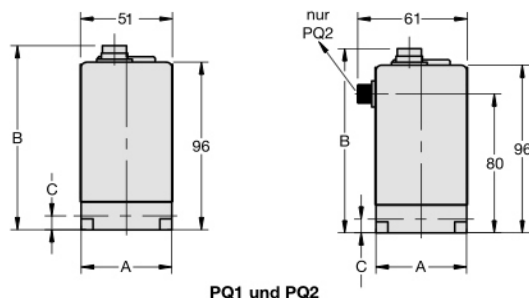

*1 at 7 bar supply pressure and open outlet, at regulated flow rate of 3 l/min
*2 higher supply pressure on request *3 air consumption