


RGDJ - Détendeur basse pression, compensé, de précision, compatible air comprimé, gaz non corrosif, biogaz

Description	Highly sensitive low pressure regulator with inlet pressure compensation for high precision regulation. Zero shut-off prevents outlet pressure from increasing.	
Media	compressed air or non-corrosive gases, dryly biogas H ₂ S < 200 ppm	
Supply pressure	max. 400 mbar	
Air consumption	without constant bleed	
Adjustment	manual by turning the spindle under the cover of the spring cage	
Relieving function	non-relieving	
Accuracy	at maximum volume flow: < 20% FS pressure deviation	
Gauge port	none as standard, optionally gauge port G $\frac{1}{4}$ on one side from size R $\frac{3}{4}$ " on any, preferably bonnet upwards	
Mounting position	any, preferably bonnet upwards	
Temperature range	-20 °C to 70 °C / -4 °F to 158 °F	
Material	Body: aluminium Elastomer: NBR/Buna-N	Inner valve: aluminium and plastic

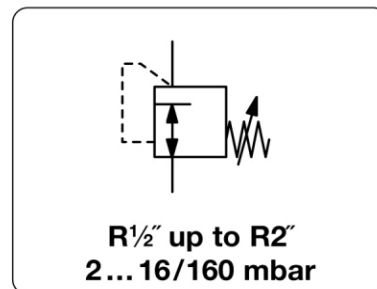

Dimensions			Nominal size	Kv-value	Flow rate		Connection thread	Pressure range	Order number
A	B	C	DN	(m ³ /h)	m ³ /h*1	l/min*1	R	mbar	

Low pressure regulator			supply pressure max. 400 mbar, non-relieving				RGDJ		
100	120	30	15	0.66	12	200	$\frac{1}{2}$ "	2 ... 16 10 ... 20 16 ... 28 22 ... 40 40 ... 55	RGDJ-04A RGDJ-04B RGDJ-04C RGDJ-04D RGDJ-04E
125	166	34	20	1.49	27	450	$\frac{3}{4}$ "	5 ... 15 12 ... 25 22 ... 35 30 ... 50 45 ... 65 60 ... 80 75 ... 100 100 ... 160	RGDJ-06A RGDJ-06B RGDJ-06C RGDJ-06D RGDJ-06E RGDJ-06G RGDJ-06I RGDJ-06L
125	166	34	25	2.6	51	850	1"	pressure range see R3/4	RGDJ-08.
155	194	45	40	4.9	90	1500	$1\frac{1}{2}$ "	5 ... 15 12 ... 25 22 ... 35 30 ... 50 45 ... 65 60 ... 80 75 ... 100 100 ... 160	RGDJ-12A RGDJ-12B RGDJ-12C RGDJ-12D RGDJ-12E RGDJ-12G RGDJ-12I RGDJ-12L
200	219	52	50	6.6	120	2000	2"	5 ... 15 12 ... 25 22 ... 35 30 ... 50 45 ... 65 60 ... 80 75 ... 100	RGDJ-16A RGDJ-16B RGDJ-16C RGDJ-16D RGDJ-16E RGDJ-16G RGDJ-16I






Special options, add the appropriate letter

Connection thread G $\frac{1}{4}$	for pressure gauge	not for R $\frac{1}{2}$ "	RGDJ-...M
-----------------------------------	--------------------	---------------------------	-----------

Accessories, enclosed

pressure gauge	Ø 63 mm, 0...*2 mbar, G $\frac{1}{4}$	from R $\frac{3}{4}$ "	MA6302-...*2
----------------	---------------------------------------	------------------------	--------------

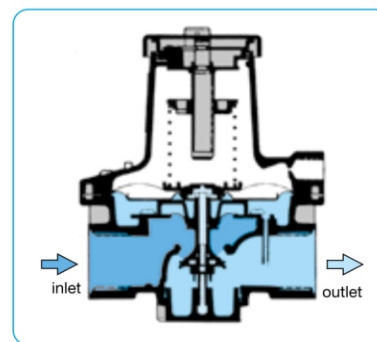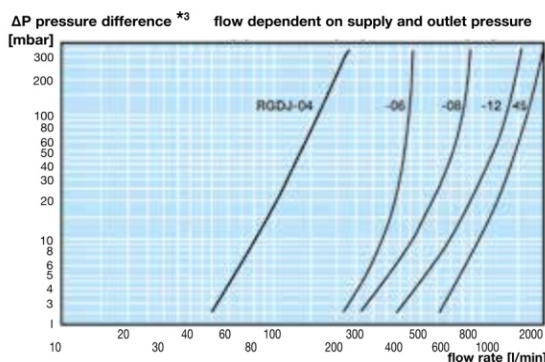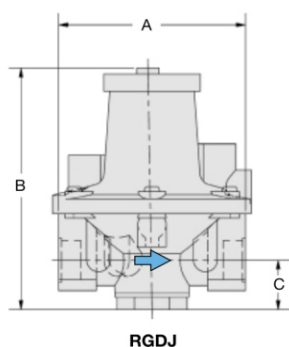

*1 at 350 mbar supply pressure and 100 mbar outlet pressure
*2 B6 = 0...60 mbar, C2 = 0...160 mbar

*3 $\Delta p = P_1 - P_2$, difference between supply and outlet pressure

