


R035 - R095 - Régulateur de pression, par diaphragme à rouleau, bonne sensibilité, associable en batterie ou avec filtre, lubrificateur. Corps en nylon ou POM

Description	Modular regulator, easy to interlock with other regulators, filters or filter regulators of the same series, without the need for double nipples or any other fittings. A sensitive rolling diaphragm allows good pressure regulation.		
Media	compressed air, non-corrosive gases or liquids		
Supply pressure	max. 12.5 bar, max. 10 bar for R035, max. 16 bar bei R042		
Adjustment	by plastic knob with snap-lock, R035 without snap-lock		
Relieving function	relieving, optionally non-relieving		
Gauge port	G $\frac{1}{8}$ on both sides of the body (G $\frac{1}{4}$ at R095), one screw plug supplied		
Mounting position	any		
Temperature range	0 °C to 50 °C / 32 °F to 177 °F		
Material	Body: nylon, Elastomer: NBR/Buna-N Inner valve: brass Thread insert: brass	POM at R035 and R042	



G $\frac{1}{8}$ up to G1

Dimensions			Kv-value (m ³ /h)	Flow rate m ³ /h*1 l/min*1		Connection thread G	Pressure range bar	Order number
A	B	C						
mm	mm	mm						

Pressure regulator			supply pressure max. 12.5 bar, for series R035 max. 10 bar, for series R042 max. 16 bar, relieving, without pressure gauge					R0
36	61	12	0.11	15	250	G $\frac{1}{8}$	0 ... 6 0 ... 6	R035-01B R035-01RB
42	102	20	0.36	51	850	G $\frac{1}{4}$	0 ... 4 0 ... 8 0 ... 12	R042-02B R042-02C R042-02D
52	129	38	0.59	84	1400	G $\frac{3}{8}$	0 ... 4 0 ... 8 0 ... 12	R050-03B R050-03C R050-03D
52	129	38	0.63	90	1500	G $\frac{1}{2}$	0 ... 4 0 ... 8 0 ... 12	R052-04B R052-04C R052-04D
63	145	42	1.0	138	2300	G $\frac{1}{2}$	0 ... 4 0 ... 8 0 ... 12	R075-04B R075-04C R075-04D
137	145	42	1.0	144	2400	G $\frac{3}{4}$	0 ... 4 0 ... 8 0 ... 12	R080-06B R080-06C R080-06D
115	222	48	6.3	900	15000	G1	0 ... 4 0 ... 8 0 ... 12	R095-08B R095-08C R095-08D



R035



R042






R080

Special options, add the appropriate letter


non-relieving	without relieving function, also for liquids	R0...0...K
----------------------	--	------------

Accessories, enclosed

pressure gauge	Ø 23 mm, 0... ^{*2} bar, G $\frac{1}{8}$, max. 12 bar Ø 40 mm, 0... ^{*2} bar, G $\frac{1}{8}$ Ø 50 mm, 0... ^{*2} bar, G $\frac{1}{4}$ Ø 63 mm, 0... ^{*2} bar, G $\frac{1}{2}$	for R035 for R042 for R050 to R080 for R095	MA2301-... ^{*2} MA4001-... ^{*2} MA5001-... ^{*2} MA6302-... ^{*2}
mounting bracket	made of steel, mounting nut at the device	for R042 for R050 to R080 for R095	BW30-01 BW42-01 BW00-02
set of brackets	made of steel	for R035	C350100018
connection clips			



BW30-01



BW42-01





R035-01RB battery assembly



R035 assembly with connecting clips C350100018

series	D	Ø E	F	K	L
R035	8	3.5	20	-	36
R042	10.5	4.5	31	-	42
R050/52	16	5.5	41	63	52
R075	17.5	5.5	45	75	63
R080	17.5	5.5	45	-	63
R095	65	8.5	174	115	95

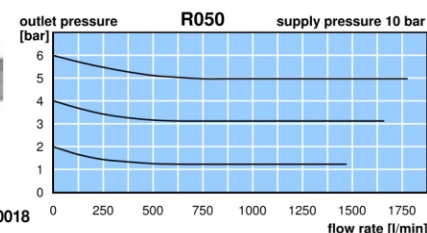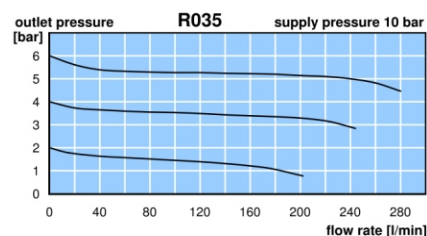

*1 at 10 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop
*2 04 = 0...4 bar, 06 = 0...6 bar, 10 = 0...10 bar, 16 = 0...16 bar