


R03-J - Régulateur de pression piloté, booster, avec préréglage d'un décalage constant entre pression de pilotage et pression de sortie

Description	Pilot-operated volume booster with positive bias designed to supply outlet pressure equal to signal pressure plus an adjustable preset spring constant. With very high forward and reverse flow characteristics and excellent sensitivity. If requested the system pressure can also manually be adjusted up to 6 bar adding to the pilot pressure.	
Media	oil-free and 5 µm filtered compressed air or non-corrosive gases	
Supply pressure	max. 16 bar	
Pilot pressure	max. 10 bar, accordingly lower in the case of manual pre-pressure setting	Pilot port G $\frac{3}{8}$
Accuracy	at supply pressure change from 2 bar to 7 bar: < 6 mbar pressure deviation at flow rate change from 0 l/min to 20 l/min: < 20 mbar pressure deviation response sensitivity: < 2 mbar	
Air consumption	1.5 l/min at P _i = 5 bar, 2 l/min at P _i = 7 bar, 4 l/min at P _i = 10 bar, < 1% of volume flow relieving	
Relieving function	700 l/min at 6 bar outlet and 0.35 bar overpressure above setpoint	
Relief capacity	G $\frac{1}{4}$ on both sides of the body, one screw plug supplied	
Gauge port		
Temperature range	0 °C to 60 °C / 32 °F to 140 °F, for appropriately conditioned compressed air down to -30 °C / -22 °F	
Material	Body: zinc die-cast	Elastomer: NBR/Buna-N

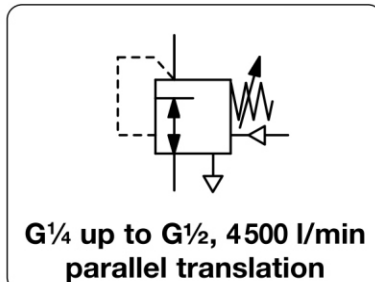








Dimensions			K _v -value	Flow rate	Connection thread	Positive bias	Pressure range	Order number
A	B	C						

Volume booster			supply pressure max. 16 bar, with constant bleed, tapped exhaust, transmission ratio 1:1					R03-J	
82	106	41	2.0	198	3300	G $\frac{1}{4}$ *3	without	0.05 ... 10	R03-02J
			2.3	228	3800	G $\frac{3}{8}$ *3			R03-03J
			2.7	270	4500	G $\frac{1}{2}$			R03-04J

Positive bias booster			supply pressure max. 16 bar, with constant bleed, tapped exhaust, transmission ratio 1:1					R03-J	
82	142	41	2.0	198	3300	G $\frac{1}{4}$ *3	0 ... 1 bar	0.05 ... 10	R03-02J1
			2.3	228	3800	G $\frac{3}{8}$ *3			R03-03J1
			2.7	270	4500	G $\frac{1}{2}$			R03-04J1
82	180	41	2.0	198	3300	G $\frac{1}{4}$ *3	0 ... 6 bar	0.05 ... 10	R03-02J6
			2.3	228	3800	G $\frac{3}{8}$ *3			R03-03J6
			2.7	270	4500	G $\frac{1}{2}$			R03-04J6

Accessories, enclosed

pressure gauge	Ø 50 mm, 0...*2 bar, G $\frac{1}{4}$	MA5002-..*2
mounting nut	made of plastic	for R03-...J1 M30x1,5K
mounting bracket	made of steel	BW00-36

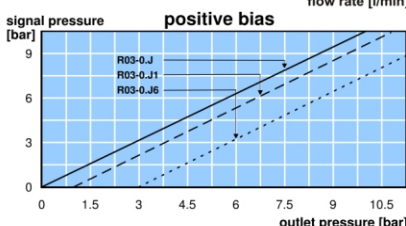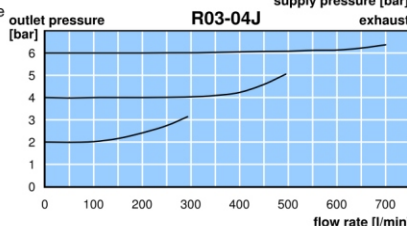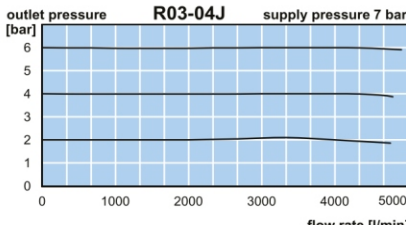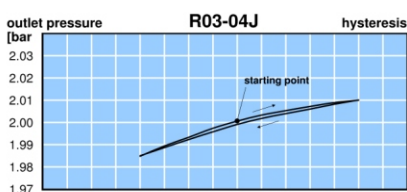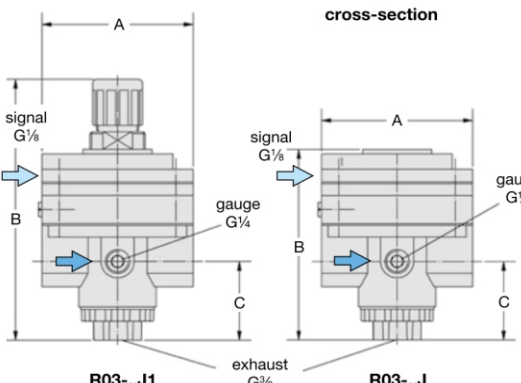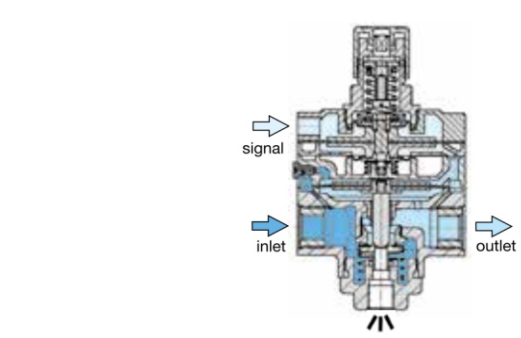

*1 at 7 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop
 *2 02 = 0...2.5 bar, 04 = 0...4 bar, 06 = 0...6 bar, 10 = 0...10 bar, 16 = 0...16 bar
 *3 standard unit G $\frac{1}{2}$ reduced to smaller threads by fittings

