


BP2 - Régulateur proportionnel de pression avec amplificateur pour grand débit, à simple ou double boucle de régulation, commande 0-10V ou 4-20mA

What are volume booster / proportional pressure regulator combinations used for?

Combinations of volume boosters and proportional pressure regulator lend themselves for electronically regulating high volume flows. On the one hand common proportional pressure regulator are not available with connection sizes big enough, on the other hand combinations are in most cases more economic. There are two ways of regulating: Single loop systems are suitable for standard applications without high requirements for accuracy and without consideration of pressure drop at high flow. Double loop regulations on the contrary are much more accurate and also qualified for dynamic processes.

General operational description:

The volume booster and proportional pressure regulator are fed by the supply pressure. When no command signal is applied the outlet pressure behind the booster is zero. When the command signal is increased the outlet pressure rises in proportion to it. Since the transmission ratio is not exactly 1:1, a slight pressure difference occurs between the outlet pressure of the proportional pressure regulator and the booster's outlet on single loop systems. This can be balanced by a feedback signal (double loop), though.

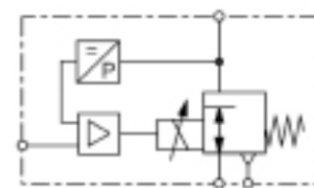

**G $\frac{1}{4}$ up to G3
compressed air or liquids**

Single loop

At single loop combinations the pressure difference between command signal and outlet pressure is being ignored because the proportional pressure regulator only refers to its own outlet pressure within the pilot chamber. The outlet pressure performance is dependent of the volume booster's accuracy.

Double loop

Combinations with a second feedback have the possibility to balance pressure differences. For this a pressure transducer is installed in the outlet line of the booster. The electrical signal of the transducer is applied as a feedback signal onto the proportional pressure regulator. The proportional pressure regulator detects any pressure differences and compensates them automatically. In high flow applications a pressure drop at the outlet of the pilot regulator is thus minimised.

General features


Construction type	The volume booster / proportional pressure regulator combinations are delivered completely assembled and calibrated.
Mounting position	preferred horizontal (see figure)
Protection class	IP 54 with ordinary coupling socket as standard, optionally IP 65 for some devices (see according product information sheets)
Temperature range	0 °C to 50 °C / 32 °F to 122 °F for all proportional pressure regulator, for booster ranges refer to according product sheets

Pneumatic features


Command signal	The proportional pressure regulator may only be fed with dry and 5 μ m filtered compressed air. The pneumatic command signal must always be air!
Media	Preferred dry, 5 μ m filtered compressed air for supply of the proportional pressure regulator. The volume boosters can operate with air or non-corrosive gases, model R120 even with liquids. The respective air consumption and the relieving function strongly have to be regarded.
Inlet pressure	dependent of the according combination (see according product information sheets)
Pressure supply	The proportional pressure regulator has to be separately supplied with compressed air with regard to the valve's maximum inlet pressure.
Exhaust	The proportional pressure regulator exhausts only the booster's pilot chamber. The booster, if in relieving version, exhausts the volume of the supply pressure line. The relief capacity is subject to the differential pressure.
Volume flow	see specifications of the according volume booster

Electrical features


Supply voltage	All valves have to be supplied with 24 V DC.
Power consumption	see according product information sheets
Setpoint input	0-10 V as standard, optionally 4-20 mA for all valves
Monitor signal	A feedback signal is not reasonable for the single loop version because here only the pressure of the booster's pilot chamber is monitored. That value does not give any information about the outlet pressure behind the booster.

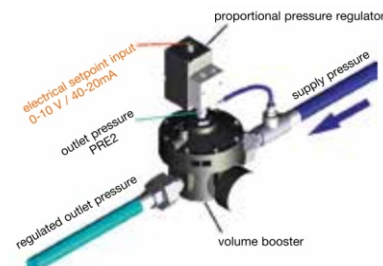

PRE2, R450 with single loop

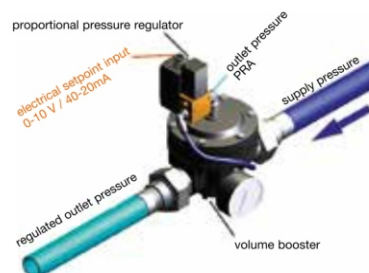

PRA, R119 with single loop

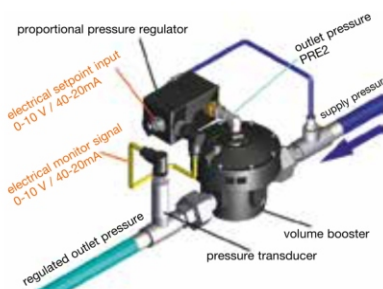


PQ2, R450 with double loop

BP2 - Régulateur proportionnel de pression avec amplificateur pour grand débit, à simple ou double boucle de régulation, commande 0-10V ou 4-20mA

General operational description:

The volume booster and proportional pressure regulator are fed by the supply pressure. When no command signal is applied the outlet pressure behind the booster is zero. When the command signal is increased the outlet pressure rises in proportion to it. Since the transmission ratio is not exactly 1:1, a slight pressure difference occurs between the outlet pressure of the proportional pressure regulator and the booster's outlet on single loop systems. This can be balanced by a feedback signal (double loop), though.

Combinations with a second feedback have the possibility to balance pressure differences. For this a pressure transducer is installed in the outlet line of the booster. The electrical signal of the transducer is applied as a feedback signal onto the proportional pressure regulator. The pressure regulator detects any pressure differences and compensates them automatically. In high flow applications a pressure drop at the outlet of the pilot regulator is thus minimised.

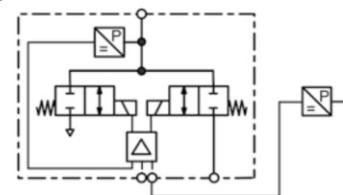

G¹/₂ up to G2
compressed air or non-corrosive gases

Double loop combination example

Flow rate l/min	Connection thread G	Outlet pressure bar	Sensor	Part number		Order number of combination
				Booster	Prop.press.reg.	

R450 with PQ2, for compressed air or non-corrosive gases setpoint 0-10 V, P₁ max. 17 bar

4000	G ¹ / ₂	0... 1	DAV-01H	R450-04I	PQ2EE-01	BP2U450-0401
		0... 6	DAV-06H	R450-04I	PQ2EE-06	BP2U450-0406
		0...10	DAV-10H	R450-04I	PQ2EE-10	BP2U450-0410



BP2U450-0406

R200 with PQ2, for compressed air or non-corrosive gases setpoint 0-10 V, P₁ max. 17 bar

28000	G1	0... 1	DAV-01H	R200-08I	PQ2EE-01	BP2U200-0801	3.604,00
		0... 6	DAV-06H	R200-08I	PQ2EE-06	BP2U200-0806	3.604,00
		0...10	DAV-10H	R200-08I	PQ2EE-10	BP2U200-0810	3.604,00



BP2U200-0806

RGB4 with PQ2, for compressed air or gases setpoint 0-10 V, P₁ max. 4 bar

700	G ¹ / ₂	0...0.35	DAV-C4H	RGB4-04J	PQ2EE-C4	BP2UGB4-04
2800	G1	0...0.35	DAV-C4H	RGB4-08J	PQ2EE-C4	BP2UGB4-08
5600	G ¹ / ₂	0...0.35	DAV-C4H	RGB4-12J	PQ2EE-C4	BP2UGB4-12



BP2UGB4-12

RZ1 with PQ2, for compressed air or gases setpoint 0-10 V, P₁ max. 16 bar

2900	G1	0...1	DAV-01H	RZ3-08J	PQ2EE-01	BP2UZ-08
5700	G ¹ / ₂	0...1	DAV-01H	RZ3-12J	PQ2EE-01	BP2UZ-12
21000	G2	0...1	DAV-01H	RZ2-16J	PQ2EE-01	BP2UZ-16



BP2UZ-08

Special options, add the appropriate letter

4-20 mA input signal BP2I...-....