


# F950 - F960 - F970 - Filtre miniature de ligne en plastique, pour air comprimé et gaz, raccordement sur canules 2.7 ou 4.7 mm, filtration de 5 à 73µm

<b>Description</b>	Compact in-line filter with fittings or threaded connection. Flow direction and filter size in µm are clearly marked.	
<b>Media</b>	compressed air or non-corrosive gases	
<b>Diameter tolerances</b>	-3% to +10% of nominal diameter	
<b>Filter element</b>	5 µm, 25 µm, 43 µm or 73 µm	
<b>Operating pressure</b>	max. 8.6 bar	
<b>Temperature range</b>	5 °C to 50 °C / 41 °F to 122 °F	
<b>Material</b>	Body: polysulphone	Filter element: Dutch weave stainless steel

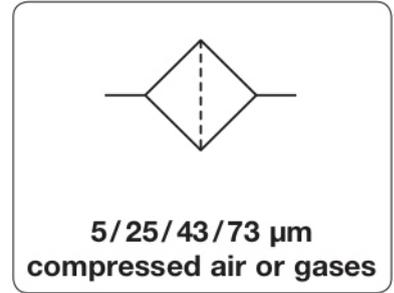



Dimensions A mm	Operating pressure max. bar	Connection inlet / outlet	Filter element µm	Order number
-----------------------	-----------------------------------	------------------------------	-------------------------	-----------------

Micro pressure filter			operating pressure max. 8.6 bar		F900
26	8.6	fittings Ø 2.7 	5	F950-05B80	
			25	F950-25B80	
			43	F950-43B80	
			73	F950-73B80	
30	8.6	fittings Ø 4.7 	5	F950-05B85	
			25	F950-25B85	
			43	F950-43B85	
			73	F950-73B85	
24	8.6	10-32" / fittings Ø 2.7 	5	F960-05B80	
			25	F960-25B80	
			43	F960-43B80	
			73	F960-73B80	
28	8.6	10-32" / fittings Ø 4.7 	5	F960-05B85	
			25	F960-25B85	
			43	F960-43B85	
			73	F960-73B85	
15	8.6	10-32" / 10-32" 	5	F970-05	
			25	F970-25	
			43	F970-43	
			73	F970-73	



## Accessories, enclosed

connecting nipple for F960 and F970	10-32" / fitting Ø 2.7	F3120-80
	Ø 4.7	F3120-85
	Ø 5.6	F3120-86



fitting	for tube		
<b>B80</b>	Ø2.7	1/16"	Ø1.6 mm
<b>B85</b>	Ø4.7	1/8"	Ø3.2 mm
<b>B86</b>	Ø5.6	0.17"	Ø4.3 mm

