



Coupleurs de sécurité, série 170
Profil ARO 210 - Passage de 5.5 mm

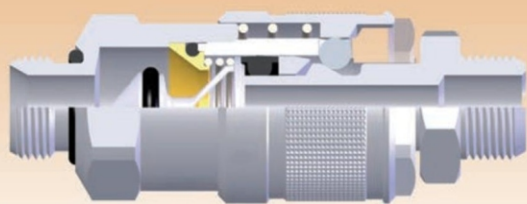


Débit :
1300 NI/min
à 6 Bar (ΔP : 1 Bar)

Pression :
0 - 16 BAR



171


implantation mâle cylindrique



CODE	A	B	D	L	CH
171 644	1/4	8	24	50	21
171 633	3/8	9	24	51	21
171 622	1/2	10	24	52	24

172


implantation femelle cylindrique



CODE	A	B	D	L	CH
172 644	1/4	12	24	51	21
172 633	3/8	12	24	52	21
172 622	1/2	15	24	56,5	24

195

équipé d'une douille cannelée

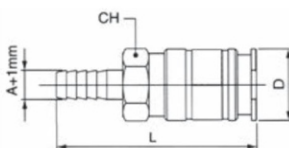


CODE	A	D	L	CH
195 606	6	24	61	21
195 608	8	24	61	21
195 610	10	24	61	21

embouts en laiton nickelé - profil ARO 210

271


embout mâle cylindrique



CODE	A	B	L	CH
271 644	1/4	8	36	17
271 633	3/8	9	37	19
271 622	1/2	10	38,5	24

272



embout femelle cylindrique



CODE	A	B	L	CH
272 644	1/4	11	36	17
272 633	3/8	11,5	36,5	19
272 622	1/2	14	39	24

275

embout avec douille cannelée

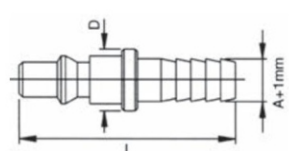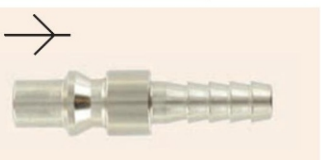

CODE	A	D	L
275 606	6	11	42,5
275 608	8	11	42,5
275 610	10	14	45,5
275 612	12	16	45,5