



Coupleurs de sécurité, à double détente, simple obturation, pour air comprimé.
Série SNX 60, selon la norme ISO 4414 - Profil européen - Passage de 7.4 mm - Inoxydable 316L



SNX 61

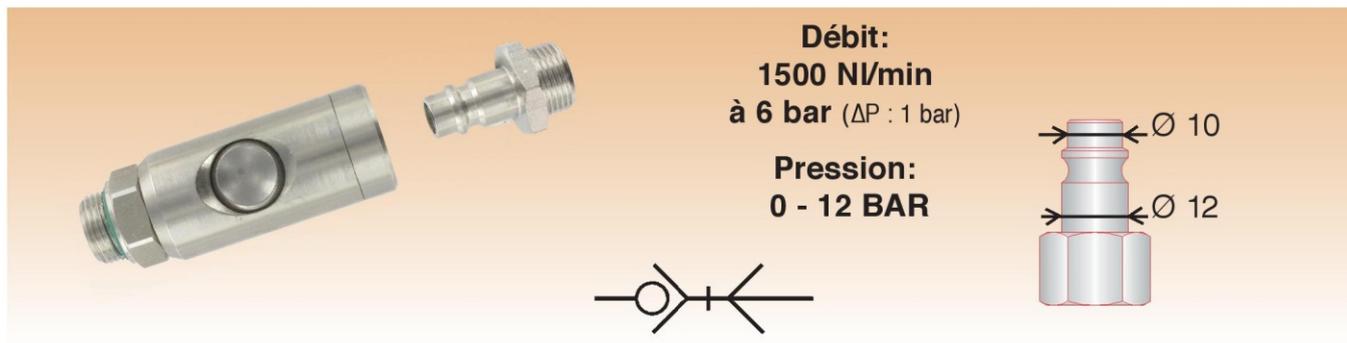

implantation mâle BSP cylindrique avec joint monté




CODE	A	B	D	L	CH	DN
SNX61 744	1/4	6,5	26	70	21	7,4
SNX61 733	3/8	7	26	70	21	7,4
SNX61 722	1/2	8,5	26	72,5	25	7,4

SNX 62



implantation femelle BSP cylindrique




CODE	A	B	D	L	CH	DN
SNX62 744	1/4	9	26	73,5	21	7,4
SNX62 733	3/8	10	26	75,5	21	7,4
SNX62 722	1/2	11	26	77,5	24	7,4

SNX 65



équipé d'une douille cannelée




CODE	Ø tube	A	D	L	CH	DN
SNX65 706	6	7	26	88,5	21	7,4
SNX65 709	9	10	26	88,5	21	7,4
SNX65 713	13	14	26	88,5	21	7,4

SX 61



embout mâle cylindrique




CODE	A	B	L	CH
SX61 704	1/4	8	33	17
SX61 703	3/8	9	34	21
SX61 702	1/2	15	42	22

SX 62



embout femelle cylindrique



CODE	A	B	L	CH
SX62 704	1/4	11	33	17
SX62 703	3/8	11,5	33	21
SX62 702	1/2	14	45	25