

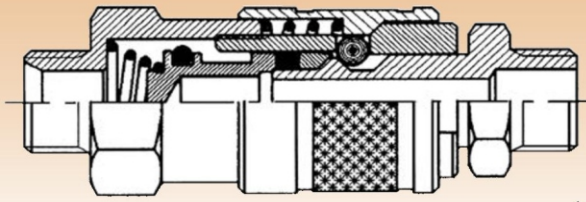


Coupleurs de sécurité, série 130
Profil ISO 6150 B-15 - Passage de 8 mm




Débit :
2500 NI/min
à 6 Bar (ΔP : 1 Bar)

Pression :
0 - 16 BAR



131



implantation mâle cylindrique



CODE	A	B	D	L	CH
131 833	3/8	9	28	56	24
131 822	1/2	10	28	56	24

132



implantation femelle cylindrique



CODE	A	B	D	L	CH
132 833	3/8	11,5	28	56,5	24
132 822	1/2	14	28	59	24

135


équipé d'une douille cannelée



CODE	A	D	L	CH
135 808	8	28	66	24
135 810	10	28	66	24
135 812	12	28	66	24

231



embout mâle cylindrique



CODE	A	B	L	CH
231 833	3/8	9	40	19
231 822	1/2	10	42	24

232



embout femelle cylindrique



CODE	A	B	L	CH
232 833	3/8	11,5	40	20
232 822	1/2	14	42	24

235

embout avec douille cannelée



CODE	A	D	L
235 808	8	15	46
235 810	10	15	46
235 812	12	15	48,5