



Micro-coupleurs en laiton nickelé
Série 110 - Passage de 2.7 mm



111

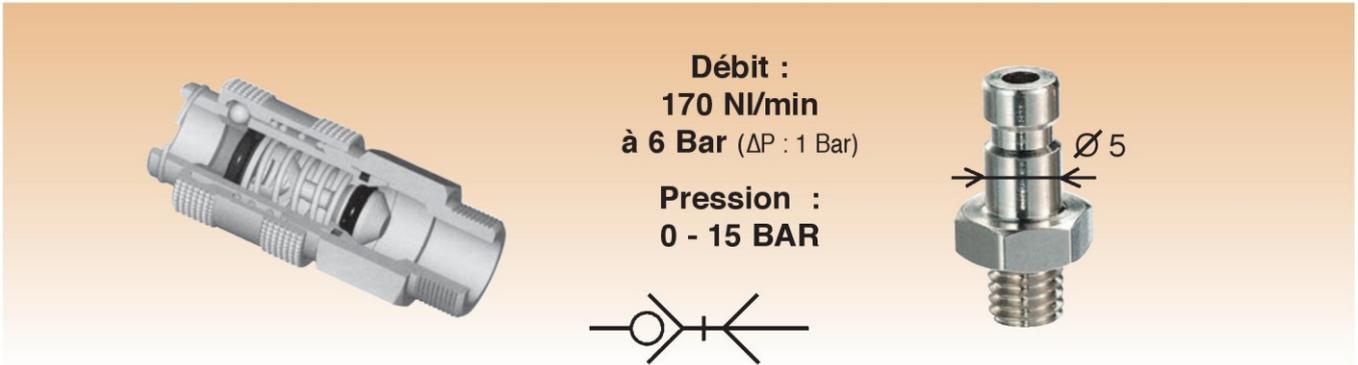

implantation mâle cylindrique




CODE	D1	D2	L1	CH
111 050	M5	10	27	9
111 080	1/8	10	29	12

112



implantation femelle cylindrique




CODE	D1	D2	L1	CH
112 050	M5	10	27	9
112 080	1/8	10	29	12

114




avec raccord à coiffe




CODE	D1	D2	L1	CH
114 042	4/2,5	10	33	9
114 064	6/4	10	35	9

115




avec douille cannelée




CODE	D1	D2	L1	CH
115 003	3	10	36	9
115 004	4	10	36	9

embouts passage libre en laiton nickelé pour micro coupleurs

211




embout mâle cylindrique




CODE	D1	L1	CH
211 050	M5	17	8
211 080	1/8	20	12

212




embout femelle cylindrique




CODE	D1	L1	CH
212 050	M5	16	8
212 080	1/8	19	12

214




embout équipé d'un raccord à coiffe




CODE	D1	L1	CH
214 042	4/2,5	23	7
214 064	6/4	25	8

215



embout avec douille cannelée



CODE	D1	L1
215 003	3,6	24
215 004	4,6	24