


## F504 - Filtres de petites dimensions pour air comprimé

<b>Description</b>	Miniature compressed air filter of small, compact design. Ideal for limited space conditions.
<b>Filter element</b>	20 µm, optionally 5 µm, made of propylene
<b>Bowl</b>	plastic or metal version
<b>Drainage</b>	manual drain as standard, for max. 21 bar optionally semiautomatic drain, for max. 12 bar
<b>Operating pressure</b>	max. 11 bar for plastic bowl max. 21 bar for metal bowl
<b>Temperature range</b>	0 °C to 50 °C / 32 °F to 122 °F for plastic bowl and semiautomatic drain version 0 °C to 80 °C / 32 °F to 176 °F for metal bowl for appropriately conditioned compressed air down to -30 °C / -22 °F
<b>Material</b>	Body: aluminium Bowl: polyurethane or zinc die-cast Elastomer: NBR/Buna-N



G<sup>1</sup>/<sub>8</sub> and G<sup>1</sup>/<sub>4</sub>

Dimensions			Bowl	Flow	Supply	Filter	Connection	Order
A	B	C	Design	Capacity	rate	element	thread	number
mm	mm	mm	made of	l	m <sup>3</sup> /h*1	µm	G	

Miniature compressed air filter										F504
									with manual drain	
40	106	96	plastic	0.04	36	600	11	20	G <sup>1</sup> / <sub>8</sub>	F504-01AH
			metal				21			F504-01DH
			plastic		29	480	11	5		F504-01AG
			metal				21			F504-01DG
40	106	96	plastic	0.04	38	640	11	20	G <sup>1</sup> / <sub>4</sub>	F504-02AH
			metal				21			F504-02DH
			plastic		31	510	11	5		F504-02AG
			metal				21			F504-02DG



F504-02AH



F504-02DH

### Special options, add the appropriate letter


<b>NPT</b>	connection thread	F504-... N
<b>semiautomatic drain</b>	RK500SY, max. 12 bar	F504-... M
<b>automatic drain</b>	RK504SY, max. 12 bar	F504-... R

### Accessories, enclosed


<b>mounting bracket</b>	made of steel	<b>BW00-01</b>
-------------------------	---------------	----------------




RK500SY



F504



BW00-01

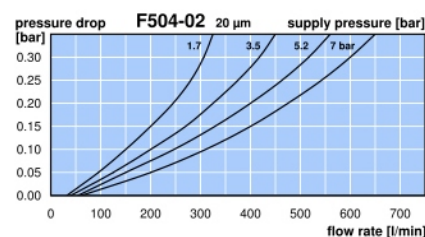

\*1 at 7 bar operating pressure and 0.33 bar pressure drop