


MS - Manomètres en Acier Inoxydable, 0 à 60 bar, diamètre 40 à 63 mm

MS - Stainless Steel Pressure Gauge with Male Thread

Description	Pressure gauge with Bourdon tube or capsule, dust-protected and splash-proof. The capsule type gauge features an integrated restrictor against pressure peaks.	
Media	all media compliant with stainless steel, e.g. compressed air, gases or fluids	
Scale	Bourdon tube gauge: white background with black bar scale and red psi scale capsule type gauge: white background with black mbar scale	
Indicator accuracy	1.6% FS	
Connection thread	G½ or G¼, on central back	
Temperature range	0 °C to 100 °C / 32 °F to 212 °F for Bourdon tube gauge 0 °C to 200 °C / 32 °F to 392 °F for Bourdon tube gauge for appropriately conditioned compressed air down to -40 °C / -40 °F	
Material	Housing: stainless steel 1.4301 Lens: polycarbonate, laminated safety glass at Bourdon type gauge Ø 63 mm and acrylic glass at capsule type gauge	Seal: FKM at capsule gauge
	Connection: stainless steel 1.4571	

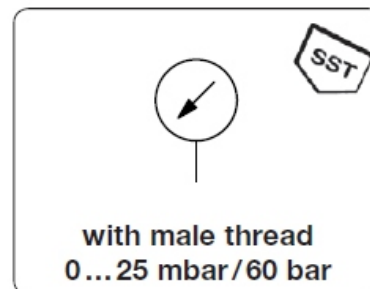

Dimensions Ø A mm	Principle R: Bourdon tube K: capsule tube	Indicator accuracy % FS	Display range bar/mbar	Order number G½	Order number G¼
-------------------------	---	-------------------------------	------------------------------	-----------------------	-----------------------

Pressure gauge	male thread on central back	MS	MS		
40	R	1.6	0 ... 2 0 ... 4 0 ... 6 0 ... 10 0 ... 16	MS4001-02	MS4002-02
				MS4001-04	MS4002-04
				MS4001-06	MS4002-06
				MS4001-10	MS4002-10
				MS4001-16	MS4002-16
50	R	1.6	0 ... 2 0 ... 4 0 ... 6 0 ... 10 0 ... 16 0 ... 25 0 ... 60		MS5002-02
					MS5002-04
					MS5002-06
					MS5002-10
					MS5002-16
					MS5002-25
		MS5002-60			
63	K	1.6	0 ... 25 mbar 0 ... 60 mbar 0 ... 100 mbar 0 ... 160 mbar 0 ... 250 mbar 0 ... 400 mbar 0 ... 600 mbar		MS6302-B2
					MS6302-B6
					MS6302-C1
					MS6302-C2
					MS6302-C3
					MS6302-C4
					MS6302-C6
63	R	1.6	0 ... 1 0 ... 2 0 ... 4 0 ... 6 0 ... 10 0 ... 16 0 ... 25 0 ... 60		MS6302-01
					MS6302-02
					MS6302-04
					MS6302-06
					MS6302-10
					MS6302-16
					MS6302-25
					MS6302-60




Special options, add the appropriate number

for oxygen

specially cleaned

MS....-...15



MS