


R540/R541 - Régulateur de pression compact à débit élevé, G1" à G1.5"

2 types de commande manuelle possibles : molette ou manette en T

Description	Diaphragm pressure regulator in small design with large volume flow. Can be blocked with a filter or lubricator by using a double nipple		
Media	Compressed air or neutral gases		
Supply pressure	max. 20 bar		
Adjustment	with lockable adjustment knob for R540, with T-handle for R541		
Relieving	relieving, optionally non relieving		
Gauge port	G1/8" on both sides, Screw plugs are supplied		
Mounting position	any		
Temperature range	0 °C to 80 °C		
Material	Body: aluminium die-cast	Spring cage: plastic reinforced with glass fibre	
	Elastomer: NBR	Inner valve: brass, plastic	



G1 up to G1½

Dimensions			K _v -value (m³/h)	Flow rate		Connection thread G	Pressure range bar	Order Number
A	B	C		m³/h*1	l/min*1			
mm	mm	mm						

Standard pressure regulator								R540
supply pressure max. 20 bar, relieving, without pressure gauge								
108	192	60	10.0	900	15000	G1	0.2 ... 2	R540-08A
							0.3 ... 3,5	R540-08B
							1.0 ... 10	R540-08C
							1.7 ... 17	R541-08D
108	192	60	10.2	924	15400	G1¼	0.2 ... 2	R540-10A
							0.4 ... 4	R540-10B
							1.0 ... 10	R540-10C
							1.7 ... 17	R541-10D
108	192	60	10.4	948	15800	G1½	0.2 ... 2	R540-12A
							0.4 ... 4	R540-12B
							1.0 ... 10	R540-12C
							1.7 ... 17	R541-12D



R540
with knob





R541
with T-handle

Special options, add the appropriate letter

T-handle	with locknut	up to 10 bar	R541 - ...
non relieving	without relieving function		R54 - ... K
flange connection	according to EN-1092-1 or ASME B16.5	on request	R54 - ... F.

Accessories, enclosed

Pressure gauge	Ø 50 mm, 0...*2 bar, G1/8"	MA5001- . . *2
-----------------------	----------------------------	----------------

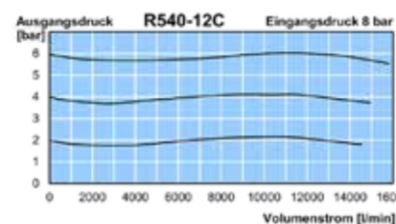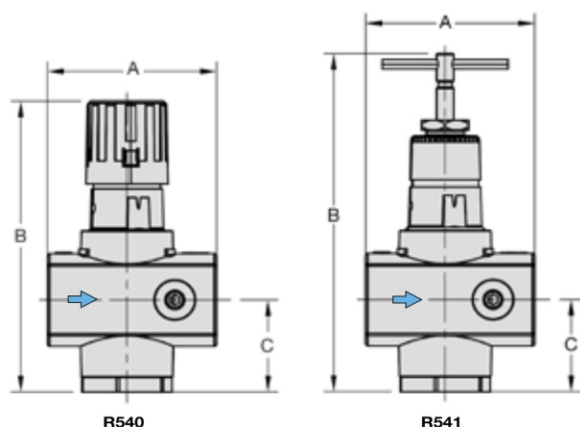

*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop

*2 02 = 0...2,5 bar, 04 = 0...4 bar, 06 = 0...6 bar, 10 = 0...10 bar, 16 = 0...16 bar, 25 = 0...25 bar