


MS - Manomètres "tout" acier inoxydable, 0 à 60 bar, diamètre 40 à 63 mm Boitier Inox, raccord inox

Description	Pressure gauge with Bourdon tube or capsule, dust-protected and splash-proof. The capsule type gauge features an integrated restrictor against pressure peaks.	
Media	all media compliant with stainless steel, e.g. compressed air, gases or fluids	
Scale	Bourdon tube gauge: white background with black bar scale and red psi scale capsule type gauge: white background with black mbar scale	
Indicator accuracy	1.6% FS	Connection thread G½ or G¼, on central back
Temperature range	medium	0 °C to 100 °C / 32 °F to 212 °F for capsule type gauge 0 °C to 200 °C / 32 °F to 392 °F for Bourdon tube gauge for appropriately conditioned compressed air down to -40 °C / -40 °F
	ambient	max. 60 °C / 140 °F
Material	Housing: stainless steel 1.4301 Inspection glass: laminated safety glass at MS63, single strength glass at MS40 and MS50 Connection: stainless steel 1.4571	Seal: FKM at capsule gauge

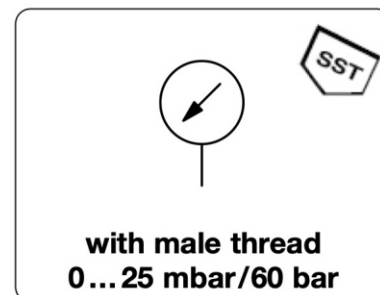

Dimensions	Principle	Indicator accuracy	Display range	Order number	Order number
Ø A	R: Bourdon tube K: capsule tube	% FS	bar / mbar	G½	G¼

Pressure gauge		male thread on central back	MS40	MS40/50/63			
40	R	1.6	0 ... 2.5	MS4001-02			
			0 ... 4	MS4001-04			
			0 ... 6	MS4001-06			
			0 ... 10	MS4001-10			
			0 ... 16	MS4001-16			
50	R	1.6	0 ... 2.5	MS5002-02			
			0 ... 4	MS5002-04			
			0 ... 6	MS5002-06			
			0 ... 10	MS5002-10			
			0 ... 16	MS5002-16			
50	R	1.6	0 ... 25	MS5002-25			
			0 ... 60	MS5002-60			
			63	K	1.6	0 ... 25 mbar	MS6302-B2
						0 ... 60 mbar	MS6302-B6
						0 ... 100 mbar	MS6302-C1
0 ... 160 mbar	MS6302-C2						
0 ... 250 mbar	MS6302-C3						
63	K	1.6	0 ... 400 mbar	MS6302-C4			
			0 ... 600 mbar	MS6302-C6			
			63	R	1.6	0 ... 1	MS6302-01
						0 ... 2.5	MS6302-02
						0 ... 4	MS6302-04
0 ... 6	MS6302-06						
0 ... 10	MS6302-10						
63	R	1.6	0 ... 16	MS6302-16			
			0 ... 25	MS6302-25			
			0 ... 60	MS6302-60			



MS5002-04



MS6302-04

Special options, add the appropriate number

for oxygen specially cleaned

MS.....15

