


# L20 - Lubricateur, graisseur, huileur pour air comprimé, moyenne pression 17 bar

<b>Description</b>	Standard type mist lubricator of modular design with exchangeable insert kits. Can be interlocked with a filter or regulator without need for double nipples. A bypass valve and venturi nozzle guarantee low pressure drop and uniform lubrication of the compressed air. All "maxi" instruments are easy to take out of fixed piping by simply removing the two fastening bolts on the insert kits.		
<b>Bowl</b>	metal bowl with sight glass		
<b>Operating pressure</b>	max. 17 bar		
<b>Oil refilling</b>	oil refilling under pressure possible		
<b>Oil level indicator</b>	red ball inside the sight glass indicates oil level		
<b>Temperature range</b>	0 °C to 70 °C / 32 °F to 158 °F		
<b>Material</b>	Body: zinc die-cast	Sight glass: polyurethane	Elastomer: NBR/Buna-N
	Bowl: zinc die-cast		

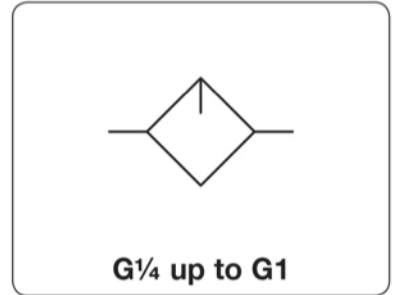

Dimensions			Bowl		Flow rate		Operating pressure	Connection thread	Order number
A	B	C	Design	Capacity	m <sup>3</sup> /h*1	l/min*1	max. bar	G	
mm	mm	mm	made of/with	l					





"Maxi" lubricator										
								operating pressure max. 17 bar		<b>L20</b>
89	229	170	metal/sight glass	0.3	108	1800	17	G $\frac{1}{4}$	<b>L20-02W</b>	
					186	3100		G $\frac{3}{8}$	<b>L20-03W</b>	
					336	5600		G $\frac{1}{2}$	<b>L20-04W</b>	
111	229	170	metal/sight glass	0.3	420	7000	17	G $\frac{3}{4}$	<b>L20-06W</b>	
					438	7300		G1	<b>L20-08W</b>	

## Special options, add the appropriate letter

<b>NPT</b>	connection thread	<b>L20-0.WN</b>
------------	-------------------	-----------------

## Accessories, enclosed

<b>set of brackets</b>	made of steel	<b>MK20-0100</b>
------------------------	---------------	------------------

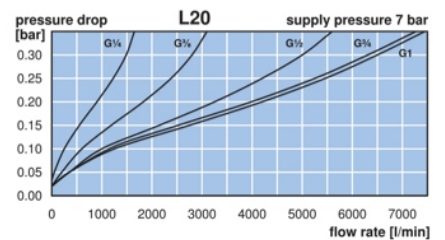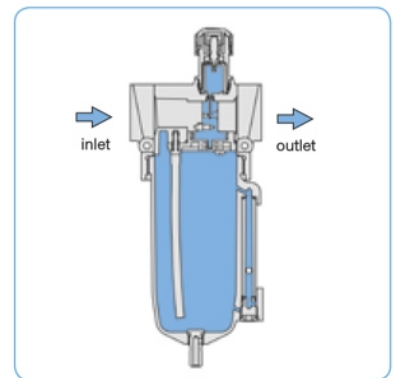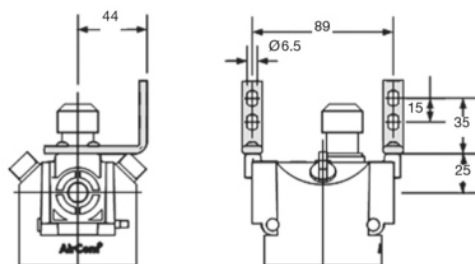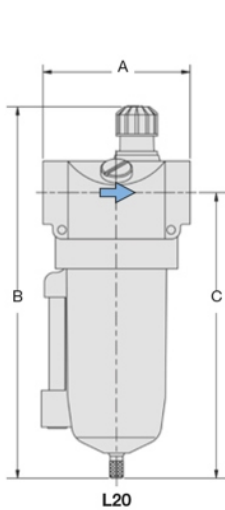

\*1 at 7 bar operating pressure and 0.33 bar pressure drop