



Coupleurs de sécurité, série 430
Profil européen DN10 - Passage de 10 mm

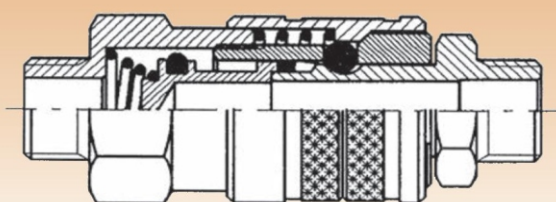


Débit :
4200 NI/min
à 6 Bar (ΔP : 1 Bar)

Pression :
0 - 16 BAR



431


implantation mâle cylindrique



CODE	A	B	D	L	CH
431 133	3/8	11,5	28	61,5	24
431 122	1/2	14	28	64	24
431 111	3/4	18	28	68	27

432


implantation femelle cylindrique



CODE	A	B	D	L	CH
432 133	3/8	11,5	28	58	24
432 122	1/2	14	28	65	27

435

équipé d'une douille cannelée




CODE	A	D	L	CH
435 009	9	28	74	24
435 113	13	28	74	24

embouts en laiton nickelé - profil européen DN10

530


embout mâle conique



CODE	A	B	L	CH
530 133	3/8	11,5	39	17
530 122	1/2	14	42,5	22
530 111	3/4	18	48,5	27

532


embout femelle cylindrique



CODE	A	B	L	CH
532 133	3/8	11	39	22
532 122	1/2	13	42	27

535

embout avec douille cannelée



CODE	A	D	L	L2
535 109	9	17	49,5	25
535 113	13	19	49,5	25