


RH83 - Régulateur haute pression, compatible air, azote, helium, krypton, dioxyde de carbone, néon, xenon.

Description	Diaphragm-operated high pressure regulator made of brass .		
Media	compressed air, nitrogen, helium, krypton, carbon dioxide, neon, xenon		
Supply pressure	max. 207 bar		
Adjustment	by slotted screw with locknut		
Relieving function	standard, optionally non-relieving		
Connection thread	¼" NPT, two high pressure inlet ports and two regulated pressure outlet ports.		
Mounting position	any		
Temperature range	-34 °C to 60 °C / -29.2 °F to 140 °F		
Material	Body: brass	Diaphragm: NBR/Buna-N and acetal	Seals: NBR/Buna-N
	Spring cage: zinc die-cast	Valve seat: teflon, brass and stainless steel	

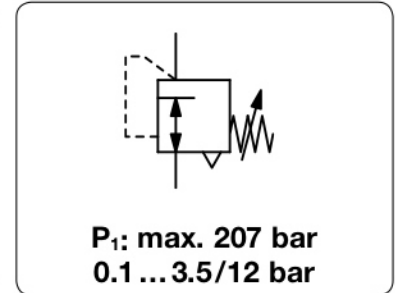

Dimensions			K _v -value (m ³ /h)	Flow rate		Connection thread NPT	Pressure range bar	Order number
A	B	C		m ³ /h*1	l/min*1			

High pressure regulator 207 bar							for compressed air, relieving made of brass, NBR/Buna-N	RH83
48	110	10	0.02	19.2	320	¼" NPT	0.1 ... 3.5	RH83-02A
							0.3 ... 8.5	RH83-02B
							0.7 ... 12	RH83-02C




RH83

Special options, add the appropriate letter



non-relieving	without relieving function	RH83-02. K
carbon dioxide	CO ₂	RH83-02. K03
argon	Ar	RH83-02. K05
nitrogen	N ₂	RH83-02. K07
helium	He	RH83-02. K09
inert gas	krypton, neon, xenon	RH83-02. K31

Accessories, enclosed

pressure gauge	Ø 50 mm, ¼" NPT	MA5002-..*2N
-----------------------	-----------------	---------------------



RH83

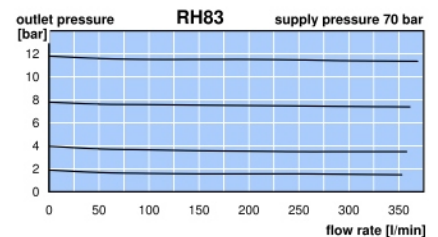

*1 bei P₁ = 70 bar, P₂ = 4 bar und Δp = 0.35 bar

*2 **04** = 0...4 bar, **11** = 0...11 bar, **16** = 0...16 bar