


L042 - L095 - Lubrificateur pour réseau d'air comprimé, modulaire, en technopolymère

Description	Standard type mist lubricator which lubricates in proportion to flow rate. The modular lubricator can be interlocked with other instruments of the same series. Wall mounting through two drilled holes in the body, except for L095.		
Bowl	plastic version with bowl guard		
Operating pressure	max. 12,5 bar,	max. 16 bar for Series 042	max. 7 bar for lubricator with oil level indicator
Oil refilling	with semiautomatic oil refilling the oil is drawn into the bowl by a vacuum at the push of a button without need to interrupt operation.		
Oil level indicator	if the oil level falls below the limit value, a float will close a signal contact. Contact: NO Voltage: max. 115 V		
Temperature range	0 °C to 50 °C / 32 °F to 122 °F		
Material	Body: nylon, POM at Series 042 Bowl: polyamide	Elastomer: NBR/Buna-N Inner valve: brass	



G $\frac{1}{4}$ up to G1

Dimensions			Bowl		Flow rate		Operating pressure	Connection	Order number
A	B	C	Design	Capacity	m ³ /h*	l/min*	max. bar	thread	
mm	mm	mm	made of / with	l				G	

Lubricator, made of plastic					operating pressure max. 12.5 / 16 bar			L0	
42	157	105	plastic	0.04	120	2000	16.0	G $\frac{1}{4}$	L042-02
52	185	127	bowl guard	0.07	120	2000	12.5	G $\frac{3}{8}$	L050-03
52	185	127		0.07	126	2100	12.5	G $\frac{1}{2}$	L052-04
63	227	159		0.14	210	3500	12.5	G $\frac{1}{2}$	L075-04
137	227	159		0.14	216	3600	12.5	G $\frac{3}{4}$	L080-06
95	300	220		0.44	900	15000	12.5	G1	L095-08



L042 L052
semiautomatic oil refilling

Special options, add the appropriate letter


semiautomatic oil refilling	P _{min.} 3 bar	for L042 to L080	L0...-0.X65
oil level indicator	P _{max.} 7 bar	115 V/NO	for L050 to L095 L0...-0.X66

Accessories, enclosed

set of brackets	made of steel	for L095	BW00-02
-----------------	---------------	----------	---------







L075 L080

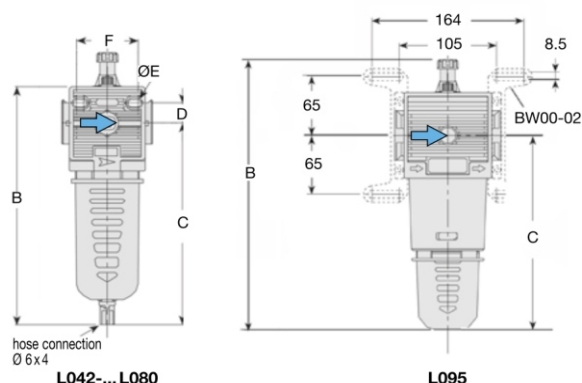



Series	D	Ø E	F	K	L
L042	10.5	4.5	31	-	42
L050/52	16	5.5	41	63	52
L075	17.5	5.5	45	75	63
L080	17.5	5.5	45	-	63
L095	-	-	-	115	95



semiautomatic oil refilling

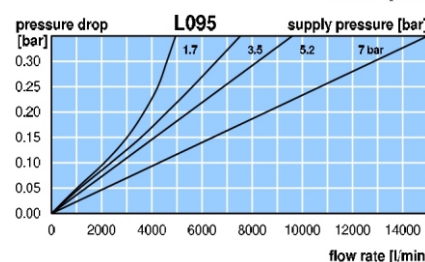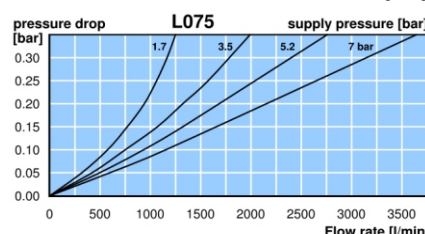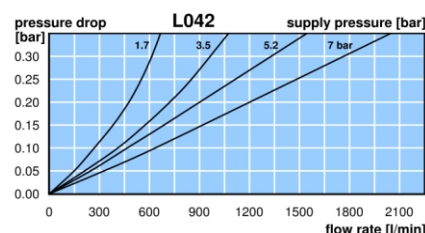

oil level indicator



oil level indicator

*1 at 10 bar operating pressure and 0.33 bar pressure drop